


ABUS EF 50 electric trolleys

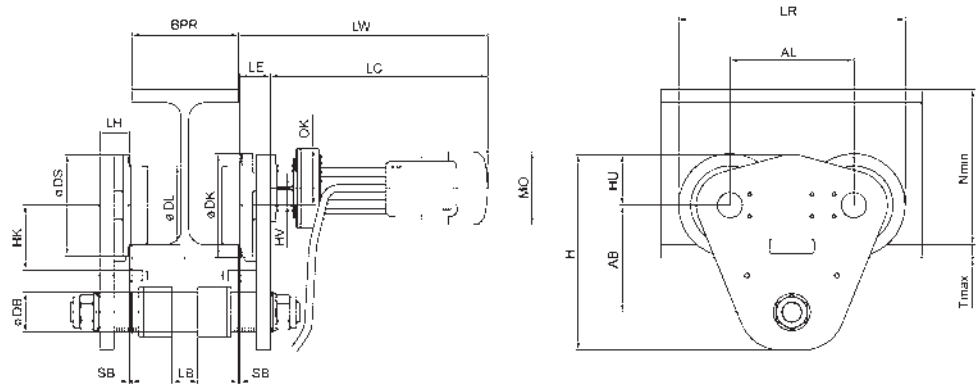

Dimensions											Ref.	Weight
LH	LV	SB (max.)	LE	LW	LC	MO	OK	Nmin	Tmax			
mm												kg
22	175	2	34	389	355	140	-	130	25	124551		37,1
22	175	2	34	389	355	140	-	130	25	124552		37,8
22	0	2	34	389	355	140	-	130	25	124553		27,1
22	0	2	34	389	355	140	-	130	25	124554		27,8
28	175	2	39	394	355	140	-	160	28	124555		49,4
28	0	2	39	394	355	140	-	160	28	124556		38,6
28	0	2	39	394	355	140	-	160	28	124557		40,5
28	0	2	39	394	355	140	-	160	28	124558		42
33	0	2	44	393	349	140	-	160	28	124559		43,9
33	0	2	44	393	349	140	-	160	28	124560		44,2
33	0	2	44	393	349	140	-	160	28	124561		46,5
33	0	2	44	393	349	140	-	160	28	124562		48,7
54	0	2	54	465	411	157	-	190	40	124563		87,9
54	0	2	54	465	411	157	-	190	40	124564		92,9

Model	Flange width BPR	Minimum bend radius
	mm	mm
EF 14	64 - 90	1100
	91 - 125	1500
	126 - 140	1700
	141 - 200	2100
	201 - 300	2250
EF 22	301 - 400	2400
	82 - 125	1700
	126 - 140	2100
	141 - 200	2200
	201 - 300	2300
EF 36	301 - 400	2500
	90 - 125	1700
	126 - 140	2100
	141 - 200	2200
	201 - 300	2300
EF 50	301 - 400	2500
	90 - 125	1800
	126 - 200	2000
	201 - 300	2200