






ELV/ELK Single Girder Cranes

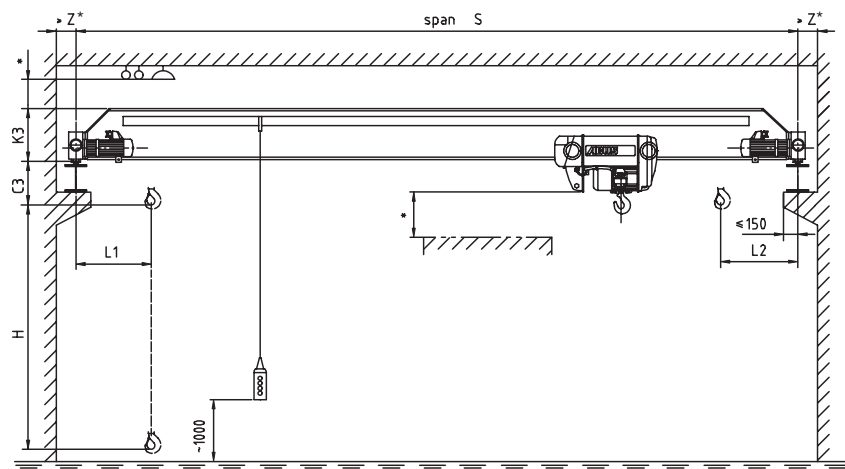


* Safety distance according to national regulations.

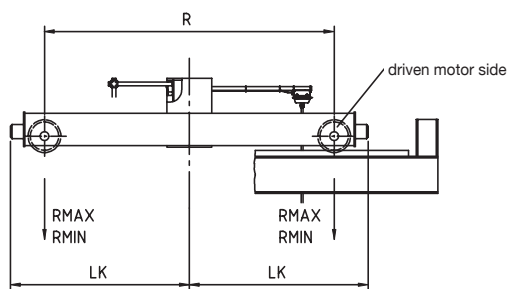

Variation 3:


The measurements K3 and C3 are ABUS standard measurements and can be changed according to the chosen main girder connection variation

For exact measurements of the Variation 1, 2, 4, 5 please contact ABUS




Variation 1:

top of the main girder = top of the end carriage




Variation 2:

all varieties between variation 1 and 3



Variation 4:

bottom of the main girder = top of the end carriage



Variation 5:

bottom of the main girder higher than the top of the end carriage but not more than 1500 mm between the top of the crane rail and the bottom of the main girder