





EDL Single Girder Underslung Cranes


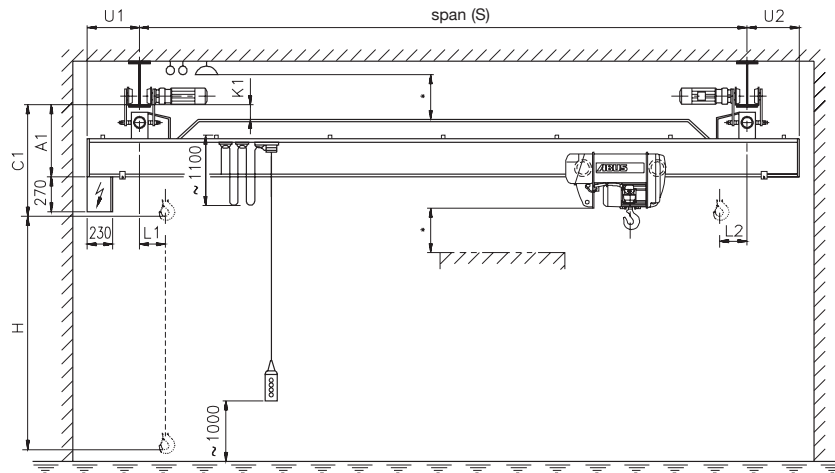


* Safety distance according to national regulations.

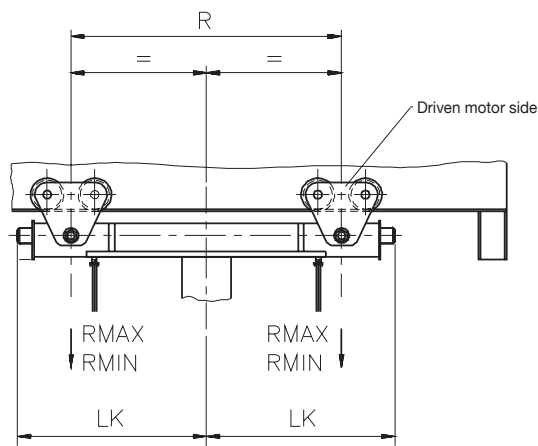

Variation 1:

The measurements A1, C1 and K1 are ABUS standard measurements and can be decreased by choosing variation 2, K1 will then increase accordingly, U1/2 has to be cut off and L1 and L2 will increase also.

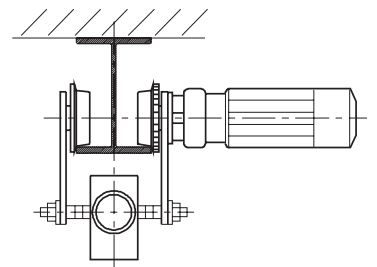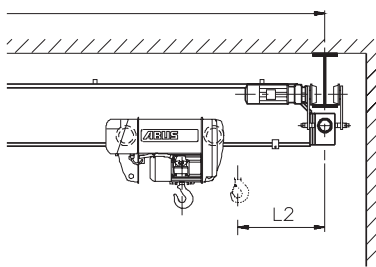

Variation 2:

bottom of the main girder = bottom of the end carriage

For exact measurements of the Variation 2 please contact ABUS