


ABUS safety conductor system

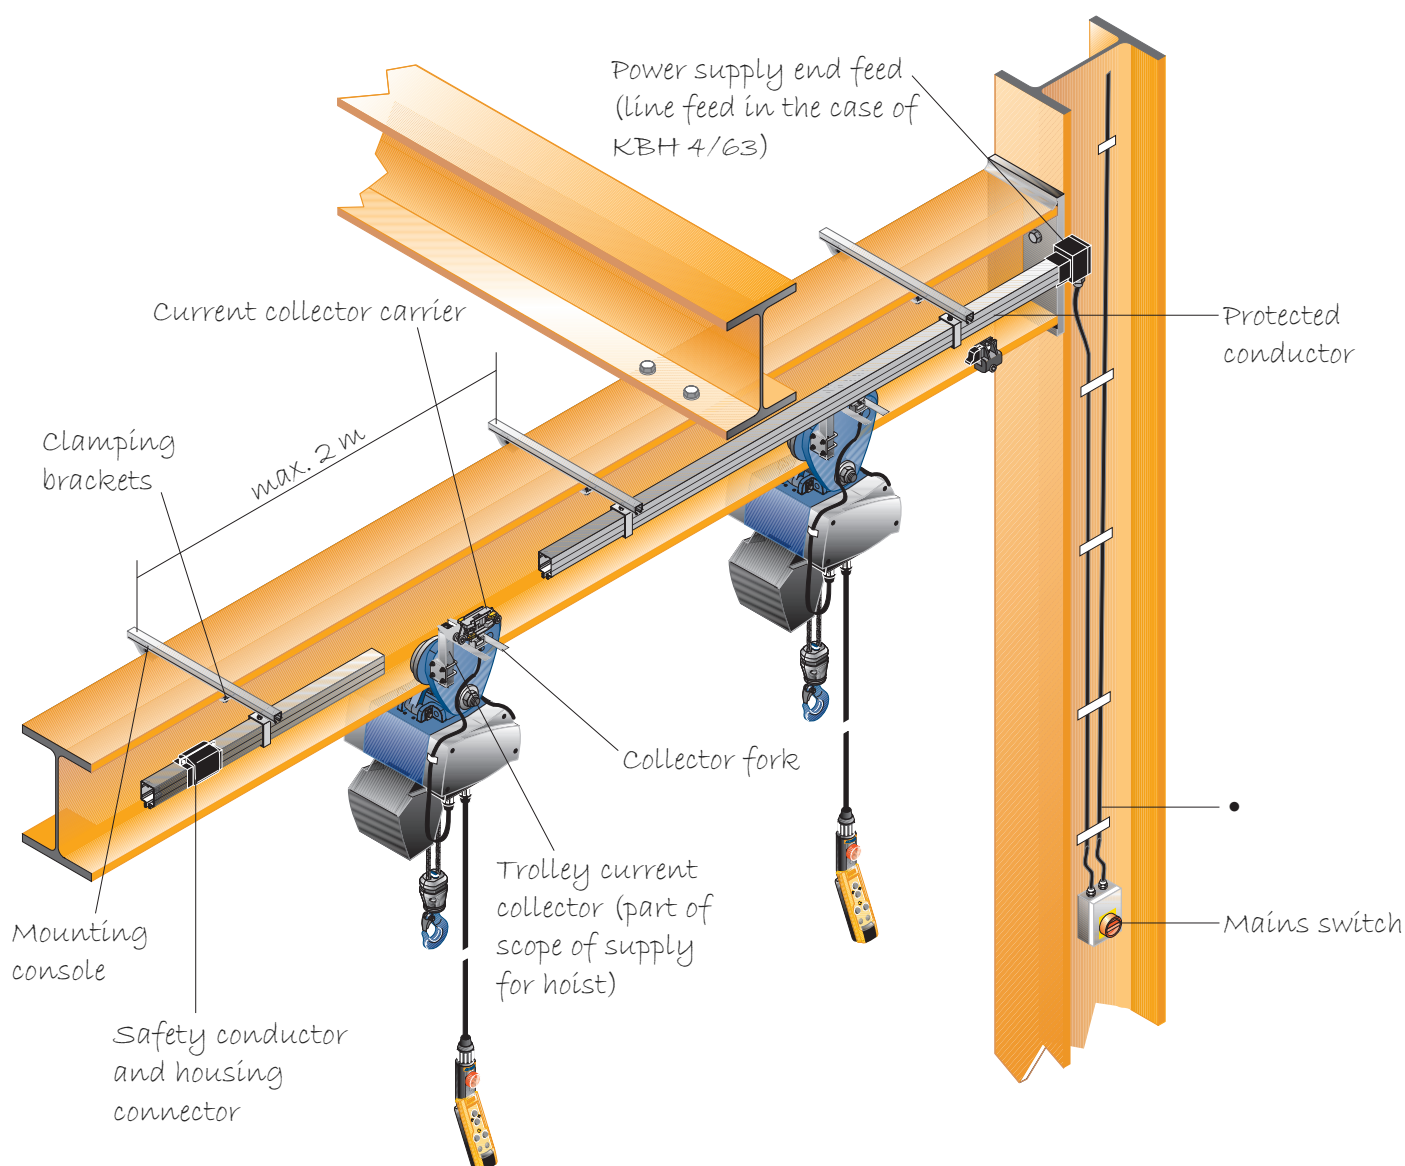

Fixed components	Length-dependent components
End cap, power supply end feed or line feed, anchor mounts, reinforcement clamps, current collector carrier with 4 m connecting cable, collector fork, mains switch	Safety conductor, sliding mounts, mounting consoles, clamping brackets
Type	Type
KBH 4/40	KBH 4/40
KBH 4/63	KBH 4/63

Power supply from the centre of the conductor is required if the track length is above 30 m.

- The riser cable from the mains switch and cabling to the power supply point, including accessories, are not included in the scope of supply.

The voltage drop corresponding to the track length must be taken into consideration for the design of the safety conductor system.