


Suspension hooks / safety hooks

for use with ABUS electric chain hoists



Suspension hooks

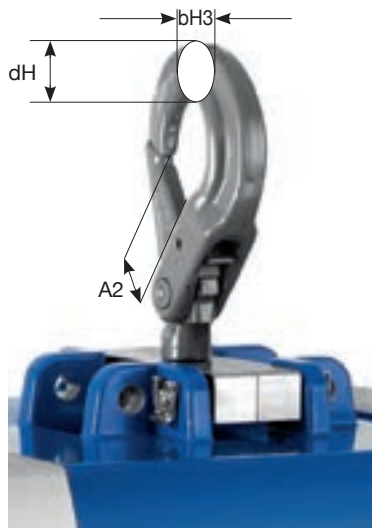

Safety hook

Overview of how to use the suspension hooks

Model of chain hoist	Maximum load capacity kg	Standard	Suspension hooks		
			Type	Ref.	Larger C dimensions mm
GMC	200	suspension bracket	BKT 6-10	313237	64
GM2	630	suspension bracket	BKT 7/8-10	313238	70
GM4	1250	suspension bracket	BKT 7/8-10	313238	80
GM6	2500	suspension bracket	BKT 13-10	313239	125

Use with ABUS travel trolleys


Model of chain hoist	Ref.	Possible trolley combinations
GMC	313237	HF 3
GM2	313238	HF 3 to Tmax = 10 mm, HF 6, EF 14
GM4	313238	HF 3 to Tmax = 10 mm, HF 6, HF/EF 14
GM6	313239	HF/EF 14 to Tmax = 15 mm, HF/EF 22

How safety hooks can be used with ABUS electric chain hoists

Model of chain hoist / No. of falls	Maximum load capacity kg	Standard Hook Type	Safety hook			
			Type	Ref.	Larger C dimensions mm	Iges mm
GMC / single fall	100	012	BKT 7/8-10	76056	44	193
GMC / double falls	200	025	BKT 7/8-10	71859	30	193
GM2 / single fall	250	012	BKT 7/8-10	76056	44	193
GM2 / single fall	320	025	BKT 7/8-10	76056	29	193
GM2 / double falls	630	05	BKT 7/8-10	71860	4	227
GM4 / single fall	630	025	BKT 7/8-10	76056	29	193
GM4 / double falls	1250	05	BKT 7/8-10	71860	4	243
GM6 / single fall	1250	05	BKT 13-10	76057	75	278
GM8 / single fall	2000	05	BKT 13-10	76057	75	298

Dimensions

Type	Dimensions in mm						
	A2	bH1	bH2	bH3	bH4	d2	dH
BKT 6-10	28	32	42	16	23	36	21
BKT 7/8-10	37	38	48	20	28	45	25
BKT 13-10	54	59	78	32	37	69	39

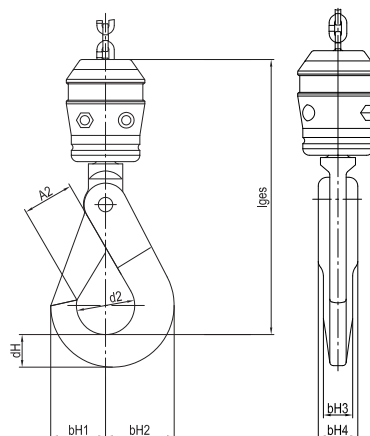

Safety hook